



Electrical Panel

Disconnect means

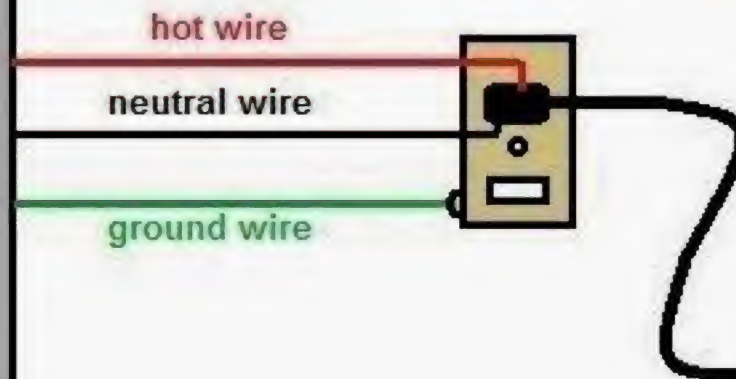


Control Cable

Power Cable

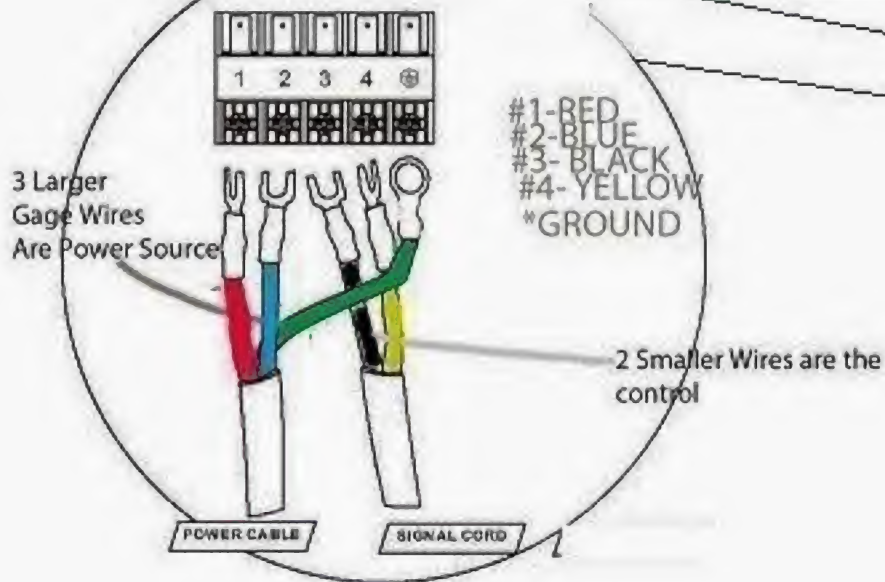

HOTLINK PROTECTION ACTIVATED - NOTE: Empty or Blank Referrals are



51-92525736-2 1PM

Protected by: ByREV WP-PICShield - HOTLINK Defence

Electric Wiring Work

INVERTER V

How?




- ❖ Do not use spliced wires or extension cord.
- ❖ Inverter product → higher harmonic

Therefore, be sure to install an earth leak detector.

Why?

Fire or electric shock may occur.
Product or earth leak detector malfunction.

Indoor & Outdoor Unit Wiring :

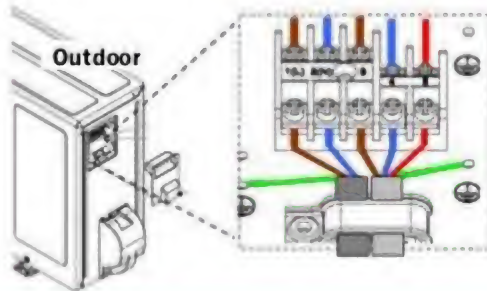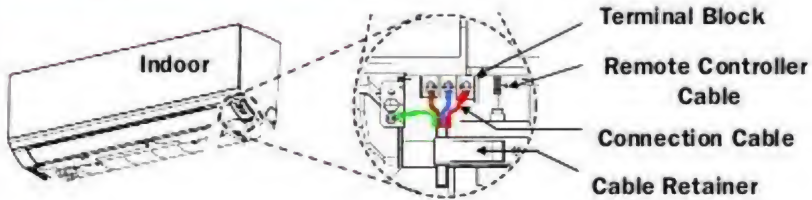



Note :



Use end-terminal for safety precautions

Excessive strip length
→ shock or leakage



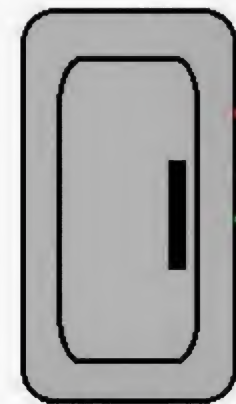

Electrical Panel

hot wire

neutral wire

ground wire

Outdoor
Disconnect means

Control Cable

Power Cable

